

ROKA

Function collection

Function collection

Function collection

Function collection

Function collection

Function collection
Function collection
Function collection
Function collection
Function collection



Function Collection highlights

15 — 25



FUNCTIONAL STYLE

DOORS CONNECTING SPACES

10 complete models

6 standard finishes, matt or microstructure powder coated

Standard doors dimensions
- up to 1150 x 2250 mm

Edge One (65 mm) and Edge Pro (75 mm) door profile

Door pull or knob on oval rosette, stainless steel

Inside handle on an oval rosette with a return spring, stainless steel

Double glazing (black edge spacer)

Transparent or satinized glass of your choice

Flag hinges, in RAL 9016 white or EV1 silver

One-point lock

Lock cylinder with 3 keys included

Simplicity can take an elegant form, especially with technical doors that offer full customization. Functionality, reliability and advanced technology embedded in an aesthetic design are our top priorities. Function doors blend seamlessly into a variety of architectural contexts: from public buildings to single-family homes and apartment complexes to commercial buildings. Our products not only meet stringent safety and durability standards, but also subtly emphasize a modern approach to


design. You will find doors that meet even the most demanding technical standards. We offer a wide selection of accessories, including panic hardware, door closers, single and double-panel models, and a variety of mailbox and intercom solutions.





FUNCTION 1

Page 12

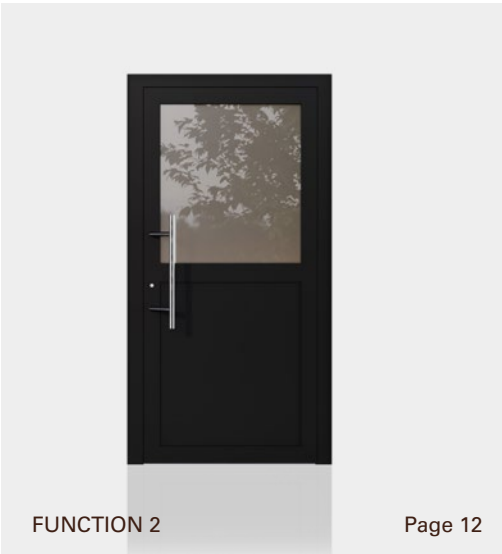


FUNCTION 2

Page 12



FUNCTION 3

Page 13

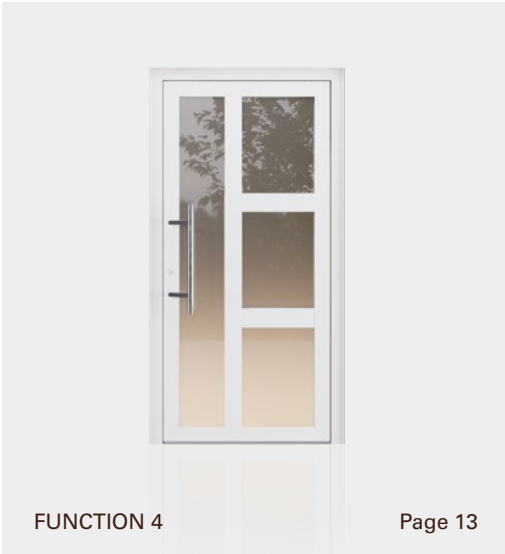


FUNCTION 4

Page 13




FUNCTION 5

Page 14

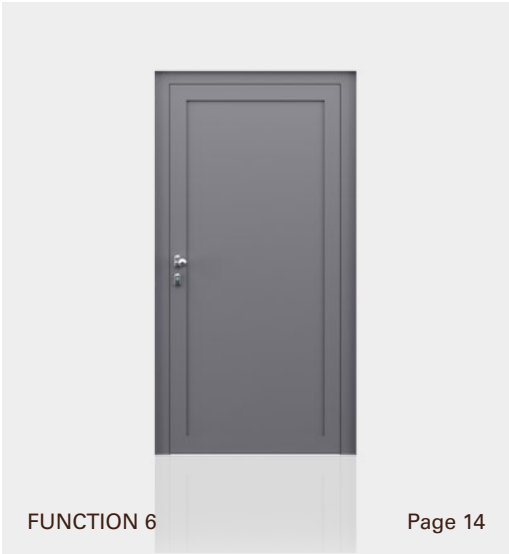


FUNCTION 6

Page 14

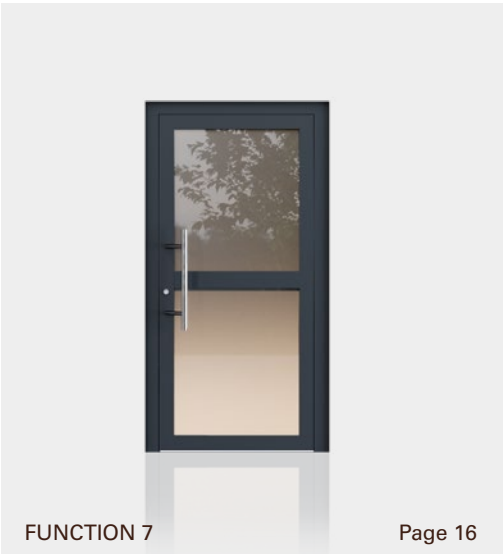

FUNCTION 7

Page 16

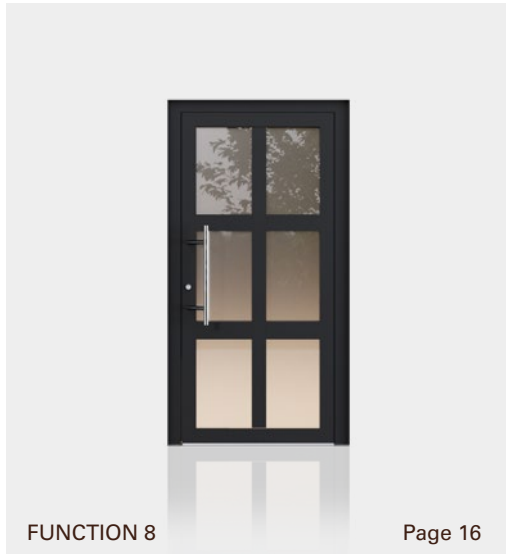


FUNCTION 8

Page 16



FUNCTION 9

Page 17

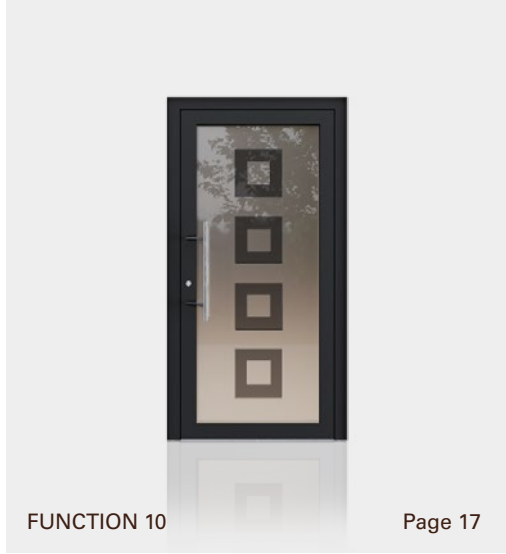

FUNCTION 10


Page 17

Our doors are the perfect solution for both offices and side entrances to single-family homes and utility rooms, combining elegance with functionality. ROKA's signature quality ensures durability and reliability to meet the needs of even the most demanding users.

Glass



Clear glass



Satin-finished glass

FINISHES

Powder coatings

matte or microstructure



RAL 9016




RAL 9006




RAL 9007



RAL 7016



RAL 7021



RAL 9005



FUNCTION 1

Door Pull ES 30.600 Stainless steel
Glass Thermofloat (outside), Satinato (inside)
Surface RAL 9016 Matte
Heat transfer coefficient (Ud) 1,05 W/m2K



FUNCTION 2

Door Pull ES 30.600 Stainless steel
Glass Thermofloat (outside), Satinato (inside)
Surface RAL 9005 Matte
Heat transfer coefficient (Ud) 1,1 W/m2K



FUNCTION 3

Door Pull ES 30.600 Stainless steel
Glass Thermofloat (outside), Satinato (inside)
Surface RAL 9007 Matte
Heat transfer coefficient (Ud) 1,2 W/m2K



FUNCTION 4

Door Pull ES 30.600 Stainless steel
Surface RAL 9016 Matte
Heat transfer coefficient (Ud) 1,3 W/m2K



FUNCTION 5

Door Pull ES 2631 Stainless steel ball knob fixed on oval rosette
Glass VSG (exterior) - satin glass (center) - float (interior)
Surface RAL 9006 Matte
Heat transfer coefficient (Ud) 1,2 W/m2K



FUNCTION 6

Door Pull ES 2631 Stainless steel ball knob fixed on oval rosette
Surface RAL 9007 Matte
Heat transfer coefficient (Ud) 1,3 W/m2K



FUNCTION 6 | RAL 9007 | Example of application



FUNCTION 7

Door Pull ES 30.600 Stainless steel
Glass Thermofloat (outside), Satinato (inside)
Surface RAL 7016 Matte
Heat transfer coefficient (Ud) 1,05 W/m2K



FUNCTION 8

Door Pull ES 30.600 Stainless steel
Glass Thermofloat (outside), Satinato (inside)
Surface RAL7021 Matte
Heat transfer coefficient (Ud) 1,1 W/m2K



FUNCTION 9

Door Pull ES 30.600 Stainless steel
Glass Thermofloat (outside), Satinato (inside)
Surface RAL 9007 Matte
Heat transfer coefficient (Ud) 1,2 W/m2K



FUNCTION 10

Door Pull ES 30.600 Stainless steel
Glass Thermofloat (outside), Satinato (inside)
Surface RAL 7021 Matte
Heat transfer coefficient (Ud) 1,3 W/m2K

MAIN EQUIPMENT

Our range of doors includes special accessories that enhance their functionality and aesthetics. We offer panic hardware for added security, door closers for convenience, and innovative mailbox and intercom solutions. With these items, our doors combine practicality with modern design, providing comfort and security every day.



ES 2209 - PROFILE CYLINDER

Profile cylinder incl. 3 keys



ES 2404 - HINGES

Overlay hinge, 2-piece, white or EV1 silver



ES 2300 - DOOR CLOSER

Top door closer with slide rail and hold-open device, RAL 9016 white or EV1 silver



ES 2100 - DOOR OPENER

Electric door opener with daytime release

OPTIONAL EQUIPMENT



ES 1800 - LOCK

BKS One-point lock



ES 30.600 - DOOR PULL

Stainless steel pull handle with angled supports



ES 2631 - DOOR KNOB

Stainless steel door pull or knob on oval rosette



ES 2680 - HANDLE

Inside handle on oval rosette with return spring, stainless steel



TRIPLE GLAZING



VSG - SAFETY GLASS

- 1. outside
- 2. outside and inside



ES 2601 - ROSETTE

Inlet round rosette (outside) stainless steel

PANIC EQUIPMENT



ES 1800 - HANDLE

Split handle on oval panic rosette



ES 1800 - LOCK

GU Secury - 1-point lock with panic function (function E)



ES 1600 - LOCK

GU Secury Automatic 3 - 3-point lock with panic function EN 179 (function A,B,C,D,E)

ROKA

Headquarter & Showroom
ul. ks. Józefa Londzina 31, 43-382
Bielsko-Biała, Poland

CONTACTS
ROKAdoors.com

Copyright © 2025 ROKA

ROKA, in order to improve the technical and qualitative characteristics of its products, reserves the right to make any changes necessary for the functional and qualitative improvement of the production without prior notice. For any technical or dimensional details, please refer to the company's price list and any updates. Please note that the colors and materials shown in the images are indicative only. ROKA disclaims any responsibility for printing inaccuracies and/or errors related to product characteristics.

ROKA Function Collection

Art direction and graphic design
Studio Nuvole
ROKA Marketing & Design Department

Copy
ROKA Marketing Department

Made and printed in Poland

Version 01